




## IEPE Bi-Axial Measurement Accelerometer Model NTI-12504

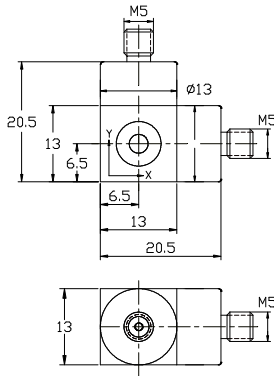

### DYNAMIC

Sensitivity $\pm 5\%$	-----	20 mV/g
Measurement Range	-----	$\pm 250$ g peak
Broadband Resolution	-----	0.0005 g rms
Amplitude Nonlinearity	-----	1 %
Frequency Range $\pm 5\%$	-----	0.5 – 5 kHz
$\pm 10\%$	-----	0.3 – 6 kHz
Resonance Frequency	-----	20 kHz
Transverse Sensitivity	-----	$\leq 5$ %

### ELECTRICAL

Excitation Voltage	-----	18 - 30 VDC
Constant Current Excitation	-----	2 – 20 mA
Output Impedance	-----	$\leq 100 \Omega$
Output Bias Voltage	-----	12 VDC
Spectral Noise (10 Hz)	-----	60 $\mu\text{g}/\sqrt{\text{Hz}}$
(100 Hz)	-----	20 $\mu\text{g}/\sqrt{\text{Hz}}$
(1000 Hz)	-----	15 $\mu\text{g}/\sqrt{\text{Hz}}$

### ENVIRONMENT

Maximum Vibration	-----	2000 g peak
Maximum Shock	-----	5000 g peak
Operation Temperature	-----	-40 to 248°F / -40 to 120°C
Sealing	-----	Welding
Base Strain Sensitivity	-----	0.0005 g/ $\mu$ strain

### PHYSICAL

Sensing Element	-----	Ceramic / Shear
Housing Material	-----	Stainless Steel
Output Connector / Position	-----	M5 / Side
Mounting Thread	-----	M5 Through Hole
Weight	-----	22 gram

### ACCESORIES SUPPLIED

- Ø 2 mm x 1 m Low Noise Cable with M5 / BNC Connectors
- M5 Through Hole Mounting Screw
- Calibration Certificate

Note: Output connector and mounting screw can be changed to English 10-32 thread by request.

